

Indoor

T100-5C VS Variable Speed



T100-5C VS

Standard Features


- ◆ Welded Steel Frame
- ◆ Chain Drive
- ◆ Solid Construction
- ◆ Machined Surfaces
- ◆ Strong, Reliable Bearings
- ◆ Machined-Pressed Fit Collector

300 LB Weight Capacity

For applications where it is necessary to change or adjust the rotation speed of the display, Semco offers the variable speed rotator. The speed control has a range from 1/2 to 5 RPM and can be mounted on the side of the rotator or in a remote location. For hanging applications this rotator is available with snap ring. (Specify T100-5C VS *SR*)

Optional Features:

- ◆ Rotation Speeds from 1/2 to 5 RPM (2 RPM Standard Speed)
- ◆ Snap-ring for hanging applications
- ◆ 110V or 220V, 50 or 60 Cycle motor
- ◆ 0 to 8 collector ring/brush assemblies available in 20A or 30A

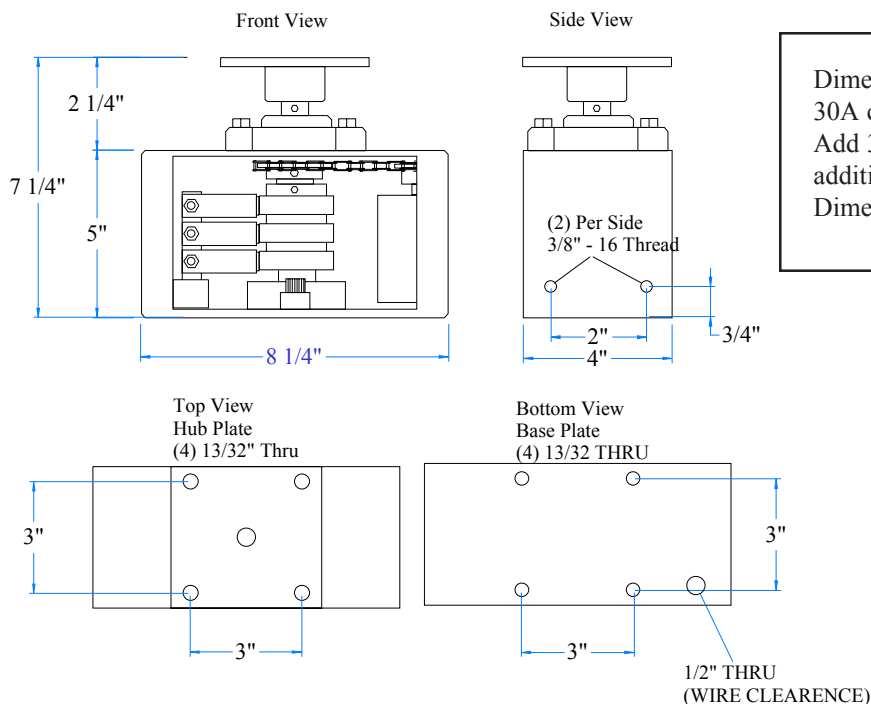

Dimensions shown are for rotator with (3) 30A collector rings.
Add 3/4" to overall height for each additional collector ring.
Dimensions for control box not shown.

www.semcomotion.com

Larsen Manufacturing Company

Tel: 866-699-5918

Fax: 801-876-2115

email: sales@semcomotion.com

