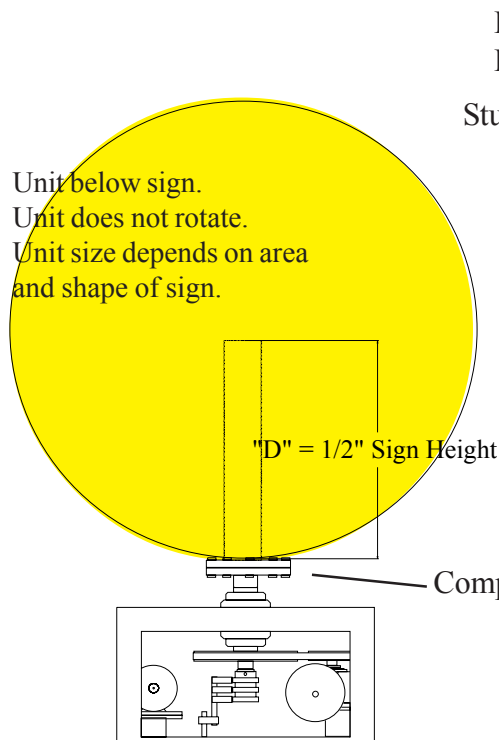
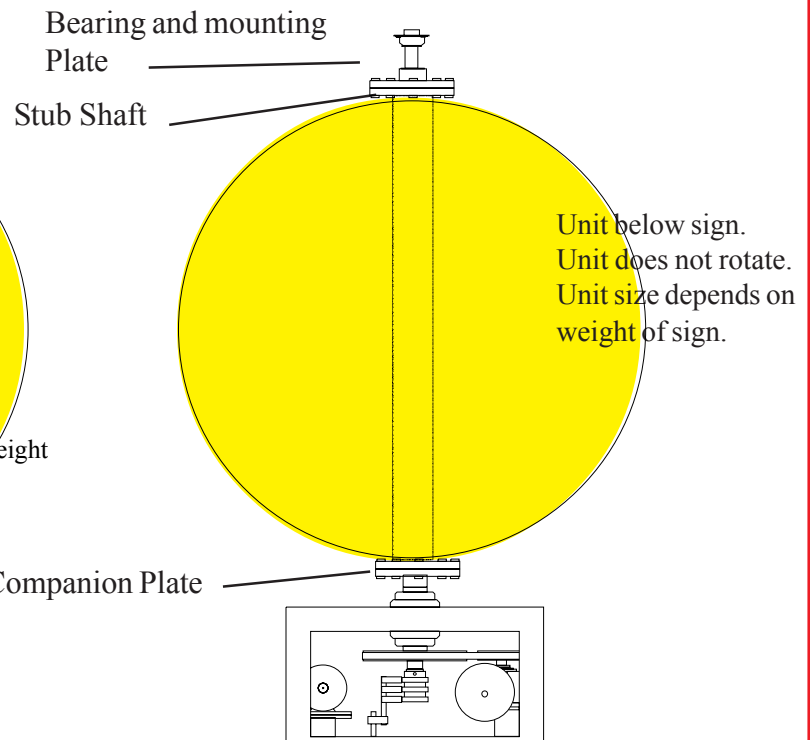


## T Series Fig 5 & Fig 6 Outdoor Illustrations



**Fig. 5**

Accessories:  
Gusseted Companion Plate  
or Plain Companion Plate  
Louvers if exposed to weather



**Fig. 6**

Accessories Required:  
Companion Plate, Stub Shaft Bearing and  
Mounting Plate.  
Louvers if exposed to weather

### Sign Capacity Fig. 5

Sign area (in sq. ft.) multiplied by "D"  
(in Feet) must not exceed the value shown  
below.

Model	Max Sign Length		Maximum Bending moment FT LBS
TS	8 ft	30	600
TM	8 ft	45	900
TL	8 ft	75	1,550
TG-200	12 ft	180	3,620
TG-243	12 ft	350	7,000
TG-293	12 ft	620	12,400

### Sign Capacity Fig. 6

Model	Max Sign Area	Max Sign Wgt	Max Sign Length
TS	40 sq. ft.	350 lbs.	8 ft.
TM	75 sq. ft.	750 lbs.	12 ft
TL	150 sq. ft.	1,000 lbs.	15 ft
TG-200	150 sq. ft.	1,500 lbs	15 ft
TG-243	200 sq. ft.	2,000 bs	20 ft
TG-293	200 sq. ft.	2,500 lbs	20 ft